

Data sheet

Item no. / Configuration 01 / 3104315-0132-010201-S-A00799
Description HMC3 315M-4 400/690 V 50 Hz 132 kW

General data	
Standard series	IEC 60034
Type	HMC3 315M-4
Design	400 VD / 690 VY 50 Hz + 480 VD / 830 VY 60 Hz
Direction of rotation	CW
Installation max. altitude (m)	1.000
Poles	4

Motor protection	
Winding temp. detector	No
Temp. detector type	None
Bearing detector	No
Winding PTC main	PTC 3 x 155°C
Winding PTC spare	None
Space heater	None
Terminal board thread	M16
Electrical insulation	Standard (1350 V @ 0.8 µs)
Tropical insulation	No
SPM	N/A
External grounding	Yes
Drain hole	Yes
Rain cap	No

Classification	
Class society	
Shaft requirement acc. to	None
Ex. code	No
Industrial certification	CE, UKCA


Mechanical data	
Frame / Shaft height	IEC 315
Type of construction	B3
Cooling method	IC411
Protection class	IP55
Temp. insulation class	F
Frame material	Cast iron
Keyway	Closed
Balancing	Half key
IEC vibration class	A
Weight (kg)	994
Bearing (DE)	NU 319 ECP / C3 / CRB
Bearing (NDE)	6319 / C3 / DGBB
Fixed bearing	NDE
Moment of inertia (kg×m ²)	3.132
Painting (color)	RAL 9005
Corrosion protection	C3L
Main terminal box pos.	DE top
Main cable entries	Blind cap 2xM63x1.5
Main cable direction	Right from DE
Main cable material	Plastic
Aux. cable entries	Blind cap 2xM20x1.5
Aux. cable direction	NDE
Aux. cable material	Plastic

		Winding operation variants				
Rated power (kW)	132	132				
Frequency (Hz)	50	60				
Connection	D/Y	D/Y				
Voltage (V)	400 / 690	480 / 830				
Full load current (A)	221 / 127	182 / 106				
No load current (A)	61.5	61.5				
Speed (rpm)	1488	1785				
Power factor 100/75/50 (%)	0.91 / 0.9 / 0.82	0.91 / 0.9 / 0.82				
Efficiency 100/75/50 (%)	95.6 / 95.9 / 94.4	96.2 / 95.8 / 94.3				
Efficiency class	IE3	IE3				
Full load torque (Nm)	847	706				
Tst/Tn	2.51	3.01				
Tmax/Tn	2.8	3.36				
Ist/In	8.1	9.81				
Temp. rise class	B	B				
Duty	S1	S1				
Sound pressure level (dBA)	77.3	82				
Min. ambient temp. (°C)	-20°C	-20°C				
Max. ambient temp. (°C)	40°C	40°C				

Data are not binding. Hoyer reserves the right to implement changes without notice. The extent of data are not equivalent to nameplate on the motors.

Data sheet

Item no. / Configuration 01 / 3104315-0132-010201-S-A00799
Description HMC3 315M-4 400/690 V 50 Hz 132 kW

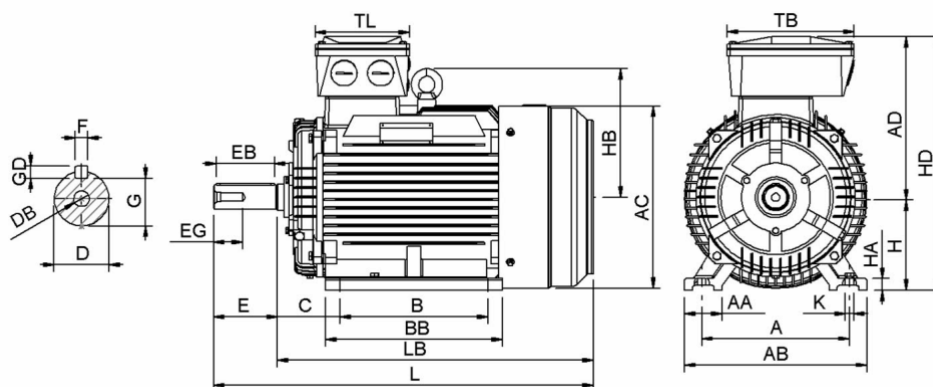

A 508.00	AA 120.00	AB 628.00	AC 618.00	AD 546.00	B 457.00	BB 680.00	C 216.00	D 80.00	DB 20.00	E 170.00	EB 160.00	EG 56.00	F 22.00	G 71.00	GD 14.00
H 315.00	HA 45.00	HB 430.00	HD 861.00	K 28.00	L 1333.00	LB 1163.00	TB 400.00	TL 280.00							